

4 Channel Input Network Video Recorder


Key Features

- ❖ 4-channel input
- ❖ Plug & Play with 4 independent PoE network interfaces
- ❖ Third-party IP cameras supported with ONVIF conformance
- ❖ Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- ❖ Up to 8 Megapixels resolution recording
- ❖ Support H.265/H.264 video formats
- ❖ Accurate retrieval, instant playback
- ❖ 1 SATA HDD up to 8 TB
- ❖ Support for P2P, UPnP, NTP, DHCP, PPPoE
- ❖ Support for mobile client access




SCI-3004-POE304

Dimensions

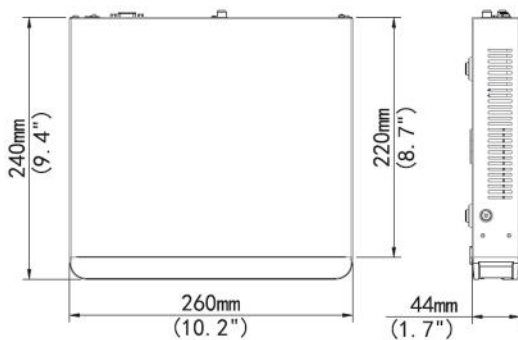

Rear Panel

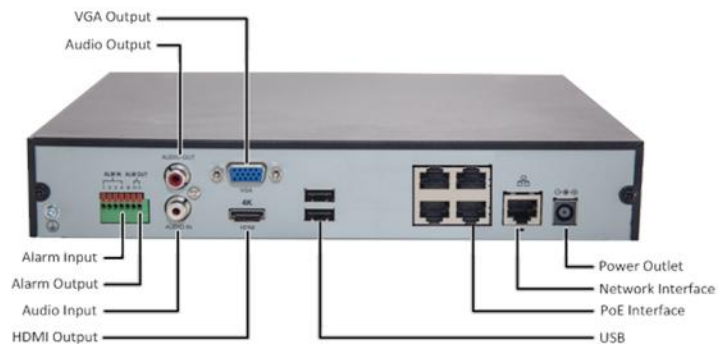

Technical Specification

Model	SCI-3004-POE304
Product Name	4 Channel Input Network Video Recorder
Video/Audio Input	
IP Video Input	4-Ch
Two-way Audio Input	1-Ch, RCA
Network	
Incoming Bandwidth	40Mbps
Outgoing Bandwidth	64Mbps
Remote Users	128
Video/Audio Output	
HDMI / VGA Output	HDMI: 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
Audio Output	1-Ch, RCA



Audio Output	1-Ch, RCA
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Synchronous Playback	4-Ch
Decoding	
Compression	H.265/H.264
Live view/ Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	1 x 4K@30, 2 x 4MP@30, 4 x 1080p@30, 8 x 720p@30, 16 x D1
Hard Disk	
SATA	1 SATA interface
Capacity	up to 8TB
External Interface	
Network Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel : 2 x USB2.0, Front panel : 1 x USB2.0
Alarm In	4-Ch
Alarm Out	1-Ch
PoE	
Interface	4 independent 100 Mbps PoE network interfaces
Supported Standard	IEEE 802.3at, IEEE 802.3af
General	
Power Supply	48V DC
Consumption (without HDD and PoE)	≤ 5 W
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)
Working Humidity	10% ~ 90%
Dimensions	44 × 260 × 240mm (1.7" × 10.2" × 9.4")
Weight (without HDD)	≤ 1.12 Kg (2.47 lb)