


## Key Features


- ❖ 64-channel input
- ❖ Support cloud upgrade
- ❖ Support N+1 Hot spare
- ❖ Support RAID 0, 1, 5, 6, 10
- ❖ Support for 12V Power output
- ❖ 8 SATA HDDs, Up to 8TB for each HDD
- ❖ Up to 12 Megapixels resolution recording
- ❖ Support Ultra H.265/H.265/H.264 video formats
- ❖ HDMI1/VGA and HDMI2 independent outputs provided
- ❖ Support 2-ch HDMI, 1-ch VGA, 1-ch CVBS, HDMI2 at up to 4K(3840x2160) resolution
- ❖ ANR technology to enhance the storage reliability when the network is disconnected
- ❖ Various fisheye dewarping modes for live view and playback for both web interface and GUI
- ❖ Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile C, Profile Q, Profile A, Profile T



## Dimensions

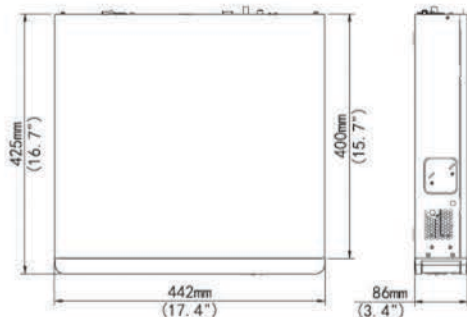

## Rear Panel

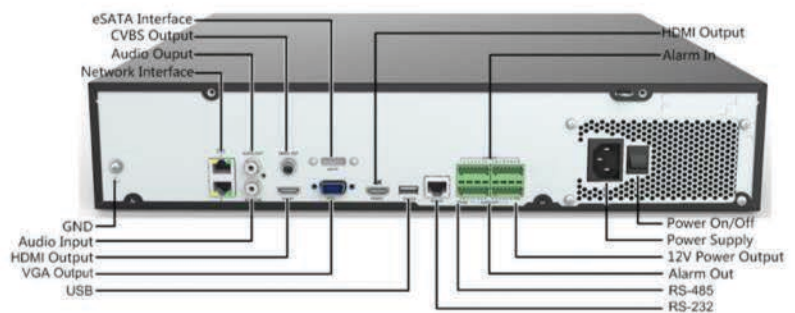

## Technical Specification

Model	SCI-5064-RDE564
Product Name	64 Channel Network Video Recorder
Video/Audio Input	
IP Video Input	64-Ch
Two-way Audio Input	1-Ch, RCA
Network	
Incoming Bandwidth	320Mbps
Outgoing Bandwidth	320Mbps
Remote Users	128
Video/Audio Output	
HDMI /VGA Output	HDMI1/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
Audio Output	1-Ch, RCA



Corridor Mode Screen	3/4/5/7/9/10/12/16/32
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Synchronous Playback	16-ch
CVBS Output	1-ch, BNC
Decoding	
Decoding Format	Ultra 265, H.265, H.264
Live view/ Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	3 x 12MP@25,4 x 4K@30,8 x 4MP@30,16 x 1080P@30,32 x 960P@25,36 x 720P@30,64 x D1
Hard Disk	
SATA	8 SATA interfaces
Capacity	up to 8TB for each HDD
eSATA	1 eSATA interface
External Interface	
Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces
USB Interface	Front panel: 2 x USB2.0,Rear panel: 1 x USB3.0
Alarm In	16-Ch
Alarm Out	4-Ch
Serial Interface	1 x RS232, 1 x RS485
Smart	
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking
VCA Search	Face search, Behavior search
Statistical Analysis	People counting
Disk Array	
Array Type	RAID 0, 1, 5, 6, 10
General	
Power Supply	100 ~ 240 VAC
Consumption ( without HDD and PoE )	≤ 20 W
Working Temperature	-10°C ~ + 55°C ( +14°F ~ +131°F )
Working Humidity	≤ 90% RH(non-condensing)
Dimensions	442mm x425mmx 86mm (17.4" x 16.7"x 3.4")
Weight ( without HDD )	≤ 5.13 Kg (11.31 lb )

SCI-5064-RDE564