


Key Features

- ❖ 50/60 fps at 1080P
- ❖ Auto back focus(ABF)
- ❖ Smart Detection supported
- ❖ Wide Dynamic Range (120dB)
- ❖ 1.2/8" 2Megapixel scan CMOS
- ❖ Efficient light sensitivity feature
- ❖ Effective protection against lightning
- ❖ H.264, H.265 encoding (Triple-Stream)
- ❖ Optimized H.265 codec implementation
- ❖ PoE, PoC power supply technology support
- ❖ Intelligent Video System for scene analytics
- ❖ 120dB wide dynamic range, ICR (Day/Night)
- ❖ 2/1 Alarm in/out, 1/1 audio in/out(Built-in Mic)



Dimensions (mm/inch):

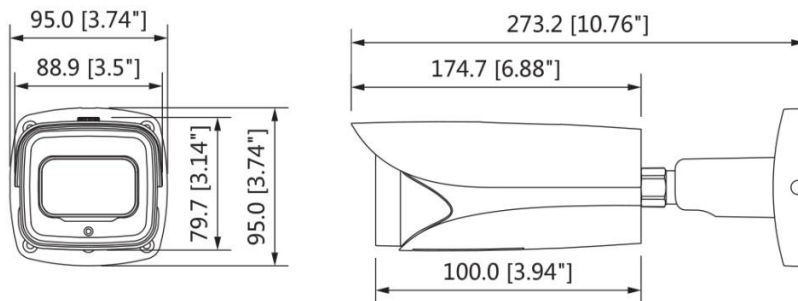

Technical Specifications

Model	SCM-OBL02MVIR-WD35EZ
Product Name	2.0 Megapixel Motorized, IR Bullet Network Camera
Camera	
Sensor	1/2.8" 2Megapixel scan CMOS
Effective Pixels	1920(H) x 1080(V)
Shutter	Auto/Manual
Mini. Illumination	Color: 0.006 Lux, 0.05Lux, and 0 Lux with IR on
S/N	> 50dB
IR Range	Up to 50m (164ft)
WDR	Up to 120 dB
Focus	Motorized

Securicorp Technologies UK Ltd., All Rights Reserved. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties relating to product. Securicorp Technologies UK Ltd. may make changes and description without notice.



Video	
Compression	H.265+/H.265/H.264+/H.264
Resolution	1080P(1920x1080),720P(1280x720),VGA(640x480)
Frame Rate	First stream: 50/60 fps - 1080 P
	Second stream: 50/60 fps - D1
	Third stream: 25/30 fps - 1080 P
Video Streaming Available	Triple
Video Bit Rate	H.264: 24~9472Kbps H.265: 14~5632Kbps
Privacy Mask	Up to 8 Areas
Day/Night	Auto (ICR), Color, B/W
Noise Reduction	3D DNR
Audio	
Audio Compression	G.726/ G.711a/ G.711Mu /AAC
Network	
Ethernet	RJ-45 (10/100Base-T)
Network Protocol	HTTP; HTTPs; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP;NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP
Interoperability	PSIA, CGI, ONVIF
Max User Access	10 Users /20 Users
Smart Phone	IOS, Android
Browser	IE, Chrome, Firefox, Safari
Interface	
Video	1 port
Audio	1/1 channel In/Out
Alarm I/O	2/1 channel
Environmental	
Power Supply	12 V DC, or PoE (802.3 af)
Power Consumption	<12.95W
Material	Metal
Storage Environment	-30° C ~ +60° C (-22° F ~ +140° F) / RH < 95%
Operating Environment	-30° C ~ +60° C (-22° F ~ +140° F) / RH < 95%
Ingress Protection	IP67
Dimensions (cm)	27.32cm×9.5cm×9.5cm
Weight (g)	1110g

Securicorp Technologies UK Ltd., All Rights Reserved. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties relating to product. Securicorp Technologies UK Ltd. may make changes and description without notice.

