


## Key Features

- ❖ IP67 rating
- ❖ 2D/3D DNR
- ❖ Smart IR, up to 30m
- ❖ ONVIF Conformance
- ❖ Day/night functionality
- ❖ Ultra 265, H.265, H.264, MPEG compression



## Technical Specifications

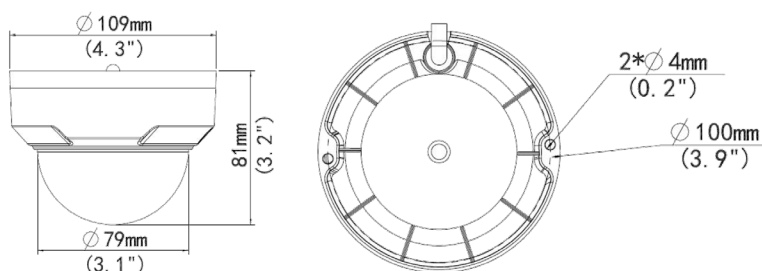

|                    |  |
|--------------------|--|
| Model              | SCP-VDM02FFIR-22RL   |
| Product Name       | 2.0 Megapixel, Vandal Resistant IR Fixed Dome Network Camera |
| Camera             |  |
| Image Sensor       | 1/2.7", 2.0 MP progressive scan CMOS                         |
| Lens               | 2.8 mm @F2.0   |
| Angle of View      | H: 112.7°, V:60.1°, O: 146.5°                                |
| Electronic Shutter | Auto/Manual, 1~1/100000s                                     |
| Mini. Illumination | 0.02Lux/F2.0( Color,AGC on)<br>0Lux (IR on)                  |
| Adjustment Angle   | Pan: 0° ~ 360°<br>Tilt: 0° ~ 75°                             |
| IR Distance        | Up to 30m  |
| S/N                | >52dB  |
| Video              |  |
| Video Compression  | Ultra 265, H.265, H.264, MJPEG                               |
| Frame Rate         | First Stream: 1080P (1920*1080), Max 30fps;                  |
|                    | Second Stream: 720P (1280*720), Max 30fps;                   |
|                    | Third Stream: CIF (352*288), Max 30fps                       |
| OSD                | Up to 4 OSDs   |

Securicorp Technologies UK Ltd. All Rights Reserved. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties related to the product. Securicorp Technologies UK Ltd. may make changes to specifications or descriptions without notice.

|                      |  |
|----------------------|--|
| Privacy Mask         | Up to 8 areas  |
| ROI                  | Up to 2 areas  |
| Motion Detection     | Up to 4 areas  |
| Smart                |  |
| Behavior Detection   | Intrusion, Motion detection, Tampering alarm   |
| Network              |  |
| Protocol             | IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, QoS |
| ONVIF                | Supported (Profile S, Profile T), API  |
| Interface            | 10/100M Base-TX Ethernet   |
| General              |  |
| Power Consumption    | <4.5W  |
| Power Supply         | DC 12V±25%, PoE (IEEE 802.3af)   |
| Weather proof rating | IP67   |
| Vandal Resistant     | IK10   |
| Working Environment  | -30°C ~ 60°C (-22°F ~ 140°F)   |
| Dimensions           | Φ109 x 81mm  |
| Weight               | 0.45 kg  |

Securicorp Technologies UK Ltd. All Rights Reserved. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties related to the product. Securicorp Technologies UK Ltd. may make changes to specifications or descriptions without notice.