


2.0 Megapixel Starlight, WDR, IP Box Network Camera

Key Features


- ❖ HD Starlight Surveillance
- ❖ Auto Day/Night Functionality
- ❖ Up to 120 dB WDR (Wide Dynamic Range)
- ❖ 3D DNR (Digital Noise Reduction)
- ❖ H.265, H.264, MJPEG
- ❖ Embedded Smart Algorithm
- ❖ Triple Streams
- ❖ ROI (Region of Interest)
- ❖ 9:16 Corridor Format
- ❖ Optional Network Interfaces with Ethernet RJ45 and Optical SFP
- ❖ ONVIF Conformance
- ❖ AC 24V /DC 12 V/PoE with Uninterruptible Power Supply
- ❖ Wide Temperature Range: -20°C to 60°C (-4°F to 140°F)
- ❖ Wide Voltage Range of ±25%
- ❖ 6 KV Surge Protection Designed for Network Interface



Dimensions

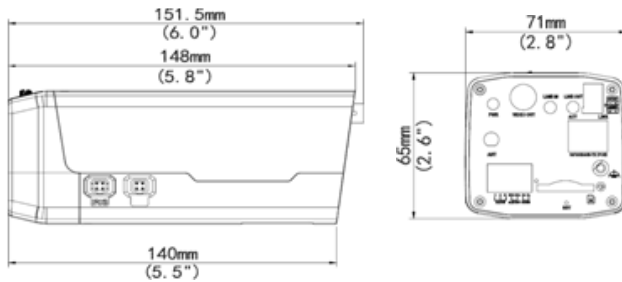

Installation

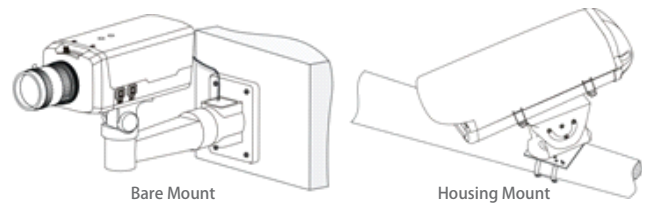

Technical Specification

Model	SCL-FBX02VF-SL26UDG
Product Name	2.0 Megapixel Starlight, WDR, IP Box Network Camera
Camera	
Sensor	1/1.9" CMOS, Progressive Scan
Day & Night	Automatically Removable IR-Cut Filter(ICR)
Shutter	Auto/Manual, 1/6~1/8000 s
Min. Illumination	Colour: 0.002 Lux (F1.2, AGC ON) 0 Lux with IR
S/N	>52dB
WDR	120dB
Lens Mount	CS
DC-Iris	DC 4V (4-Pin)
Motor Zoom/focus	DC 5V (4-Pin)

SECURICORP TECHNOLOGIES UK LTD.

support@securicorp.com | www.securicorp.com

Securicorp Technologies UK Ltd, All Rights Reserved. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties relating to product. Securicorp Technologies UK Ltd may make changes to specifications and descriptions without notice.

P 01 IP Network Surveillance Cameras Version 3.0 Copyright 2013 Securicorp Technologies UK Ltd. All Rights Reserved

Video	
Max. Resolution	1920 × 1080
Video Compression	H.265, H.264
Frame Rate	1080P (1920 × 1080): Max. 60 fps; 720P (1280 × 720): Max. 60 fps; D1 (720 × 576): Max. 60 fps
9:16 Corridor Mode	Supported
ROI	Supported
HLC	Supported
ABF	Supported
Defog	Optical/Digital
Video Streaming Available	Triple
OSD	Up to 8 OSDs
Privacy Mask	Up to 4 areas
Smart	
Behavior Detection	Intrusion, Crossing line, Motion Detection
Exception Detection	Audio Detection
Intelligent Identification	Face Detection
Statistical Analysis	People Counting
Audio	
Audio Compression	G.711
Two-way Talking	Supported
Storage	
Edge Storage	Micro SD, up to 128 GB
Network	
Protocols	L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SIP, 802.1x
Compatible Integration	ONVIF, API
Interface	
Audio I/O	3.5 mm audio interface Input: impedance 35 kΩ; amplitude 2 V [p-p] Output: impedance 600 Ω; amplitude 2 V [p-p]
Alarm I/O	2 / 1
Serial Port	1 RS485 (support Pelco-D/P)
Network	100M/1000M Base-FX SFP + 100M/1000M Base-TX Ethernet
Video Output	1 BNC, impedance 75 Ω; amplitude 1 V [p-p]
General	
Power	24 V AC, 12 V DC, or PoE (IEEE802.3 af) Power consumption: 4.8W (6.8W with ICR on)
Dimensions (L x W x H)	151.5 x 71 x 65 mm (6.0 " x 2.8 " x 2.6") (excluding the lens)
Weight	0.48 kg (1.1 lb)
Working Environment	-20° C ~ 60° C (-4° F ~ 140° F), Humidity 95% RH(non-condensing)